

Customer Information



The document is only valid in pdf format with the vertical stamp on the right margin.

Printed by MO.SCHULZ at 07:24:24 EST 02.06.2022

LEDPWL ACC 103 (3m connection cable) CI

RL 2022-06-02

9C1 4412089-EN-00

SP_SSL_LEDDL104-CB_68W 12/24V C_{ust.} Info

Released
ECM

AM-ENT-IND SSL&EL München 700
Moritz Schulz AMW


External no.:

Template: ZOT 10000028

Page 1 of 2

OSRAM GmbH: Chairman of the Supervisory Board: Peter Bauer; Managing Directors: Dr. Olaf Bertien (Chairman), Kathrin Dahnke, Dr. Stefan Kampmann;
Registered office: Munich; Commercial registry: Munich, HRB 201526; WEEE-Reg.-No. DE 71568000

Connection Cable 300 DT AX - Customer Information Sheet LEDPWL ACC 103

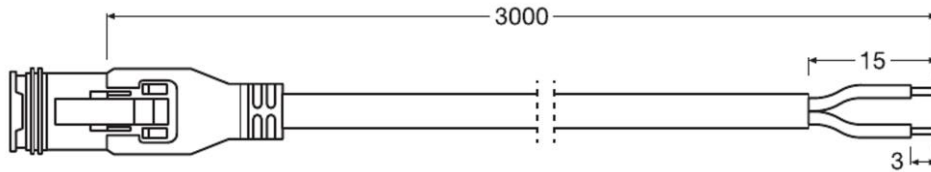

General tolerances in accordance with ISO 2768-v (Allgemeine Toleranzen nach ISO 2768-v)

Packaging content (Verpackungsinhalt)

No.	Part Name	Description	Qty
1	cable		1

Standards and regulations (Normen und Vorschriften)

Other legal requirements	ROHS, REACH
--------------------------	-------------

Electrical and photometrical data (Elektrische und lichttechnische Daten)

Characteristics (Messwert)	Symbol	Unit (Einheit)	Major / Minor	Tolerance (Toleranz) [%]

#OSRAM 0LQ(V) #MO.SCHULZ #700 #AMW #LEDPWL ACC 103 (3m connection cable) CI 2022-06-02 #RL-Released 9C1 4412089-EN-00

Customer Information



The document is only valid in pdf format with the vertical stamp on the right margin.

Printed by MO.SCHULZ at 07:24:24 EST 02.06.2022

LEDPWL ACC 103 (3m connection cable) CI

RL 2022-06-02

9C1 4412089-EN-00

SP_SSL_LEDDL104-CB_68W 12/24V Cust. Info

Released
ECM

AM-ENT-IND SSL&EL München 700
Moritz Schulz AMW

External no.:

Template: ZOT 10000028

Page 2 of 2

OSRAM GmbH: Chairman of the Supervisory Board: Peter Bauer; Managing Directors: Dr. Olaf Berlien (Chairman), Kathrin Dahnke, Dr. Stefan Kampmann;
Registered office: Munich; Commercial registry: Munich, HRB 201526; WEEE-Reg.-No. DE 71568000

Voltage (Spannung)	U	V	12/24V	
--------------------	---	---	--------	--

Further specifications (Weitere Spezifikationen)

Test (Prüfung)	Rated value (Sollwert)	Test specification (Norm)
Connector	DT06-2S-EP06	
Weight (light + application material)	249g	
Wire length	3000 mm	
Sheath material cable	inner: TPV SU2009-90 (-60°C – 90°C) outer: TPV ST1010 (-50°C – 90°C)	
Conductor diameter	2* 1,4mm (2* 1,0mm ²)	
Conductor material	copper	
Jacket outer diameter	6,7 - 6,8 mm	

Process of manufacturing (Fertigungsprozess)

This product is designed and manufactured for the Automotive Aftermarket. Please consider the product specification to match the customer requirements. Dieses Produkt wurde für den Aftermarket entwickelt und produziert. Es ist unabdingbar, die Produktspezifikation mit den Kundenanforderungen abzugleichen.

Successive listing of changes (Änderungsfortschreibung)

Issue (Ausgabe):	Reason for change (Änderungsgrund):
31.05.2022	First Version

#OSRAM 0LQ(V)
#MO.SCHULZ
#700 #MO.SCHULZ

#AMW #LEDPWL ACC 103 (3m connection cable) CI
#AMW #LEDPWL ACC 103 (3m connection cable) CI
2022-06-02
#RL-Released
9C1 4412089-EN-00